

Compact and totally enclosed digital pressurisation units with electronic pressure transducer and user-friendly microprocessor for use on sealed system in order to provide a minimum system pressure requirement.

The Flexfiller is a floor standing, flow rate (up to 18 l/min) top-up pressurisation unit with 18 litre internal break tank. Ideal for Industrial, commercial or large domestic applications. Available in single or twin pump configuration.

Application:

- Commercial, Industrial and Residential.

System Volume (Guide): < 300,000 litres.



Avantajları

Product Features:

- For system volumes up to 300,000 litres.
- Fluid Protection Category 5 (AB Weir Overflow).
- System fill mode.
- Onscreen Service Reminder - 12 Months.
- Electric pump, 230V 50Hz 1ph (2160D: 415V 50Hz 3ph).
- Colour: Black (RAL 9005).
- MODBUS RTU Communication Protocol.
- Password protected.
- Sequential programming menu.
- Pressure setting in 0.1 bar increments.
- Pump pulse option.
- Flood Protection (Pump Runtime Limiter, Excessive Start Alarm).
- Event logging: Alarm activations, Pump Run counter (activations per pump), Cumulative run timer (hours per pump), Electrical interruption.
- Volt free contacts: Common Alarm (N/C), High Pressure Alarm (N/O), Low Pressure Alarm (N/O), Sensor Health (N/O), Pump 1 Health (N/O), Pump 2 Health (N/O).

Teknik Özellikler

Operating Conditions:

- System temperature range at point of connection: 5 °C / 85 °C.
- Ambient temperature range: 5 °C / 40 °C.
- Pressure rating: PN 10.
- Relative humidity 95% non-condensing.
- Noise Rating Data: < 75 dBA.


Certifications and Standards Applied:


- PED 2014/68/EU Sound Engineering Practice.
- IEE - Electrical Safety Guidance.
- EMC 2004/108/EC.
- BS 7074 Parts 1 to 3.
- Machinery Directive 2006/42/EC.
- Electronic Components have been tested and comply with the EMC Directives.

- EN 61000-6-1: Generic Standards – Immunity standard for industrial environments.
- EN 61000-6-2: Generic Standards – Immunity standard for industrial environments.
- EN 61000-6-3: Generic Standards – Emission standard for residential, commercial and light industrial environment.
- CE marked components, where applicable.
- WRAS approved float valve to BS1212.
- IP54 (BS EN60529) rated controller.

Material of Construction:


- Cabinet: Mild steel CR4 Powder Coated.
- Float: WRAS approved.
- Break Tank: Polypropylene.
- Connection: Brass / Polypropylene.
- Pipework: Braided Flexhose / EPDM / Copper.
- Finish: Powder coated.
- Valves: Brass / PTFE.

Tip	Pompa miktarı	Bağlantısı			Max. Delivery Pressure [bar]	Power Consumption [kW]	Full Load Current [A]	Ağırlık [kg]		Sipariş Kodu
		System [mm]	Mains Supply [mm]	Overflow [mm]						
Flexfiller 125D	1	15 (1/2" M)	15 (1/2" M)	22	3,0	0,37	2,6	29	1	17395
Flexfiller 150D	1	15 (1/2" M)	15 (1/2" M)	22	6,0	0,5	3,4	31	1	17396
Flexfiller 225D	2	15 (1/2" M)	15 (1/2" M)	22	3,0	2 x 0,37	2,6	35	1	17397
Flexfiller 250D	2	15 (1/2" M)	15 (1/2" M)	22	6,0	2 x 0,50	3,4	39	1	17398
Flexfiller 180D	1	15 (1/2" M)	15 (1/2" M)	22	8,0	0,75	5,6	34	1	45049
Flexfiller 280D	2	15 (1/2" M)	15 (1/2" M)	22	8,0	2 x 0,75	5,6	45	1	17394
Flexfiller 2160D	2	15 (1/2" M)	15 (1/2" M)	22	14,4	2 x 2,2	6,6	67	1	17393

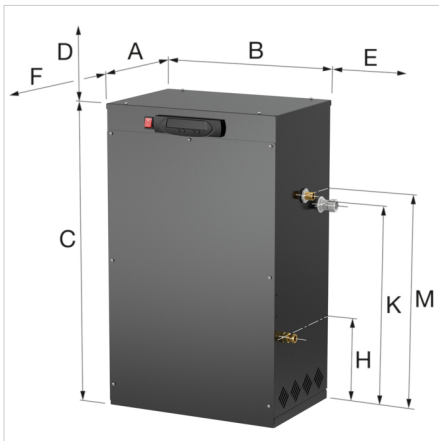

Dimensions Flexfiller

Tip	Dimensions								
	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]	H [mm]	K [mm]	M [mm]
Flexfiller 125D - 280D	330	480	760	500	150	800	220	520	580
Flexfiller 2160D	660	470	1090	500	150	800	370	690	740

**Çevrimiçi daha fazla bilgi bul:**[Installation and operating instructions](#)[Kiwa certificate K13471/08](#)[UK Declaration of Conformity](#)[EU Declaration of Conformity](#)[Flexfiller DXF](#)[Flexfiller RFA](#)[Flexfiller STEP](#)[Flexfiller IGES](#)[Collection Pressurisation Units REVIT](#)[Collection Pressurisation Units DXF](#)[Collection Pressurisation Units STEP](#)[Collection Pressurisation Units IGES](#)[Overview of spares kits](#)[Spare parts list](#)[Product Datasheet Flexfiller](#)[Product Datasheet Flexfiller 2160D](#)

Normtherm

Enj. Sist. San. Ve Tic. Ltd. Şti.

Gürpınar Mah. Gürpınar Cd.

Abaylar İş Merkezi No:16/10

, Beylikdüzü-İstanbul - tr

T 212 880 01 14

E info@normtherm.comI www.flamcogroup.com/tr