

Compact and totally enclosed digital pressurisation units with electronic pressure transducer and user-friendly microprocessor for use on sealed system in order to provide a minimum system pressure requirement.

The Flexfiller Midi is a wall mounted, flow rate (up to 12 l/min) top-up pressurisation unit with 4 litre internal break tank. Ideal for Industrial, commercial or large domestic applications. Available in single or twin pump configuration.

Application:

- Commercial, Industrial and Residential.

System Volume (Guide): < 50,000 litres.



Avantajları

Product Features:

- For system volumes up to 50,000 litres.
- Fluid Protection Category 5 (AB Weir Overflow).
- System fill mode.
- Onscreen Service Reminder - 12 Months.
- Electric pump, 230V 50Hz 1ph.
- Colour: White (RAL 9003).
- MODBUS RTU Communication Protocol.
- Password protected.
- Sequential programming menu.
- Pressure setting in 0.1 bar increments.
- Pump pulse option.
- Flood Protection (Pump Runtime Limiter, Excessive Start Alarm).
- Event logging: Alarm activations, Pump Run counter (activations per pump), Cumulative run timer (hours per pump), Electrical interruption.
- Volt free contacts: Common Alarm (N/C), High Pressure Alarm (N/O), Low Pressure Alarm (N/O), Sensor Health (N/O), Pump 1 Health (N/O), Pump 2 Health (N/O).

Teknik Özellikler

Operating Conditions:

- System temperature range at point of connection: 5 °C / 85 °C.
- Ambient temperature range: 5 °C / 40 °C.
- Pressure rating: PN 10.
- Relative humidity 95% non-condensing.
- Noise Rating Data: < 75 dBA.


Certifications and Standards Applied:

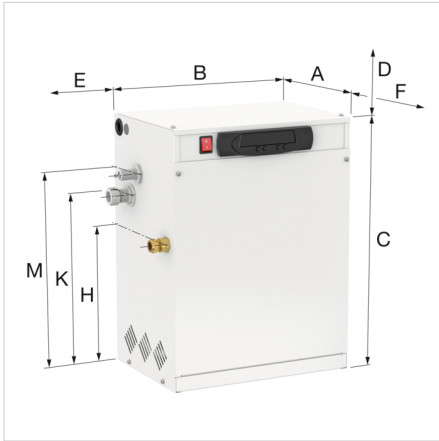
- PED 2014/68/EU Sound Engineering Practice.
- IEE - Electrical Safety Guidance.
- EMC 2004/108/EC.
- BS 7074 Parts 1 to 3.
- Machinery Directive 2006/42/EC.
- Electronic Components have been tested and comply with the EMC Directives.

- EN 61000-6-1: Generic Standards – Immunity standard for industrial environments.
- EN 61000-6-2: Generic Standards – Immunity standard for industrial environments.
- EN 61000-6-3: Generic Standards – Emission standard for residential, commercial and light industrial environment.
- CE marked components, where applicable.
- WRAS approved float valve to BS1212.
- IP54 (BS EN60529) rated controller.

Material of Construction:

- Cabinet: Mild steel CR4 Powder Coated.
- Float: WRAS approved.
- Break Tank: Polypropylene.
- Connection: Brass / Polypropylene.
- Pipework: Braided Flexhose / EPDM / Copper.
- Finish: Powder coated.
- Valves: Brass / PTFE.

| Tip | Pompa miktarı | Bağlantısı | | | Max. Delivery Pressure [bar] | Power Consumption [kW] | Full Load Current [A] | Ağırlık [kg] |  | Sipariş Kodu |
|----------------------|---------------|-------------|-------------------|---------------|------------------------------|------------------------|-----------------------|--------------|---|--------------|
| | | System [mm] | Mains Supply [mm] | Overflow [mm] | | | | | | |
| Flexfiller Midi 125D | 1 | 15 (1/2" M) | 15 (1/2" M) | 22 | 3 | 0,37 | 2,6 | 17,0 | 1 | 17460 |
| Flexfiller Midi 150D | 1 | 15 (1/2" M) | 15 (1/2" M) | 22 | 6 | 0,5 | 3,4 | 32,5 | 1 | 17461 |
| Flexfiller Midi 225D | 2 | 15 (1/2" M) | 15 (1/2" M) | 22 | 3 | 2 x 0,37 | 2 x 2,6 | 25,5 | 1 | 17462 |
| Flexfiller Midi 250D | 2 | 15 (1/2" M) | 15 (1/2" M) | 22 | 6 | 2 x 0,5 | 2 x 3,4 | 42,0 | 1 | 17463 |


Dimensions Flexfiller Midi

| Tip | Boyutlar | | | | | | | | |
|-----------------------------|----------|--------|--------|--------|--------|--------|--------|--------|--------|
| | A [mm] | B [mm] | C [mm] | D [mm] | E [mm] | F [mm] | H [mm] | K [mm] | M [mm] |
| Flexfiller Midi 125D | 230 | 240 | 480 | 500 | 150 | 800 | 270 | 340 | 380 |
| Flexfiller Midi 150D - 250D | 260 | 360 | 480 | 500 | 150 | 800 | 270 | 340 | 380 |

**Çevrimiçi daha fazla bilgi bul:**

[Installation and operating instructions](#)

[Kiwa certificate K13471/08](#)

[UK Declaration of Conformity](#)

[EU Declaration of Conformity](#)

[Flexfiller DXF](#)

[Flexfiller RFA](#)

[Flexfiller STEP](#)

[Flexfiller IGES](#)

[Collection Pressurisation Units REVIT](#)

[Collection Pressurisation Units DXF](#)

[Collection Pressurisation Units STEP](#)

[Collection Pressurisation Units IGES](#)

[Overview of spares kits](#)

[Spare parts list](#)

[Product Datasheet Midi](#)

Normtherm
Enj. Sist. San. Ve Tic. Ltd. Şti.
Gürpınar Mah. Gürpınar Cd.
Abaylar İş Merkezi No:16/10
, Beylikdüzü-İstanbul - tr

T 212 880 01 14
E info@normtherm.com
I www.flamcogroup.com/tr