

The Flamco Flexcon PA pressurisation assistant is used to monitor heating systems and to assist the installer and end-user with pressure maintenance. The Flexcon PA logs and alerts when pressurisation problems occur and assists in (or control) topping-up the heating system to the correct working pressure. It can also advise on expansion vessel life expectancy without disconnecting the vessel and you can configure monitoring on maintenance intervals for third party components. The Flexcon PA comes with a smartphone/tablet application for advanced and complete delivery of system status and guided maintenance advice.

The Flexcon PA C has the right software to connect to our Remote Service. If you do not intend to take out a remote service subscription with the device, we recommend the standard article.





Avantajları

- Eliminates unscheduled service call-outs for nuisance failures caused by pressure loss in the system, increasing comfort for end customers.
- Monitoring of fill pressure, safety valve discharges, expansion vessel end of life span and scheduled maintenance intervals of any components.
- The mobile app enables end customers to share event logs with their installer for remote support.
- The Flexcon PA gives the installer eyes on site to see how the installation's pressurisation is functioning.

Teknik Özellikler

- Suitable for heating systems up to 40,000 l and for addition of glycol-based anti-freeze up to 50%.
- Can be combined with Flamconnect Remote. (Please check your local sales office for availability.)
- Power supply: 5V AC/DC adapter.
- Working system temperature: 0 °C / 90 °C.
- Working ambient temperature: 0 °C / 40 °C.
- Working system pressure up to 3.5 bar.
- Flow rate (filling): 0.7 m³ / hour.
- Design pressure: PN 6.

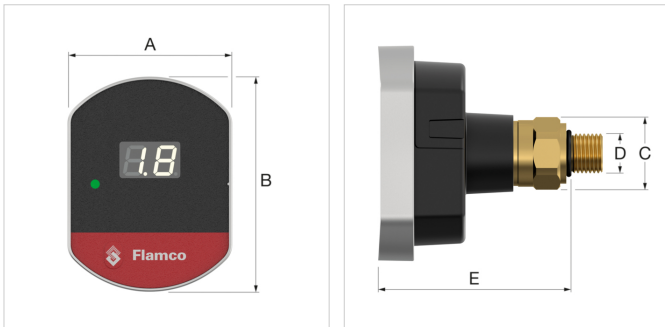

Tip	Connection (D)	Dimensions					Sipariş Kodu
		A [mm]	B [mm]	C [mm]	E [mm]		
Flexcon PA	G 1/4"	54	71	22	63	1	23760

**Çevrimiçi daha fazla bilgi bul:**

[Flexcon PA Installation and operating instruction](#)

[Manual for installing new firmware](#)

[Frequently asked questions](#)

[Declaration of conformity](#)

[Brochure Flexcon PA](#)

[Leaflet Flexcon PA - Consumer](#)

[Leaflet Flexcon PA - Installer](#)

[Frequently asked questions](#)

[Simplified topping-up procedure](#)

[Full animation](#)

[Full animation](#)

[Prescor IC Fill PA](#)

Normtherm
Enj. Sist. San. Ve Tic. Ltd. Şti.
Gürpınar Mah. Gürpınar Cd.
Abaylar İş Merkezi No:16/10
, Beylikdüzü-İstanbul - tr

T 212 880 01 14

E info@normtherm.com

I www.flamcogroup.com/tr